



2 Valve Manifolds


| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 2VM01S4MF | 1/4"NPT male | 1/4"NPT female | 1/4"NPT female | Metal | 6000 psi |
| 2VM01S4FF | 1/4"NPT female | 1/4"NPT female | 1/4"NPT female | Metal | 6000 psi |
| 2VM01S8MF | 1/2"NPT male | 1/2"NPT female | 1/4"NPT female | Metal | 6000 psi |
| 2VM01S8FF | 1/2"NPT female | 1/2"NPT female | 1/4"NPT female | Metal | 6000 psi |

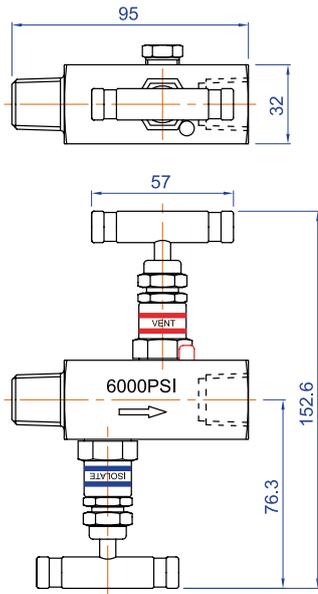


FLOW DIAGRAM




| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|---------------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 2VM02S | 1/2"NPT female | 1/2"NPT female | 1/2"NPT female | Delrin [®] | 3000 psi |

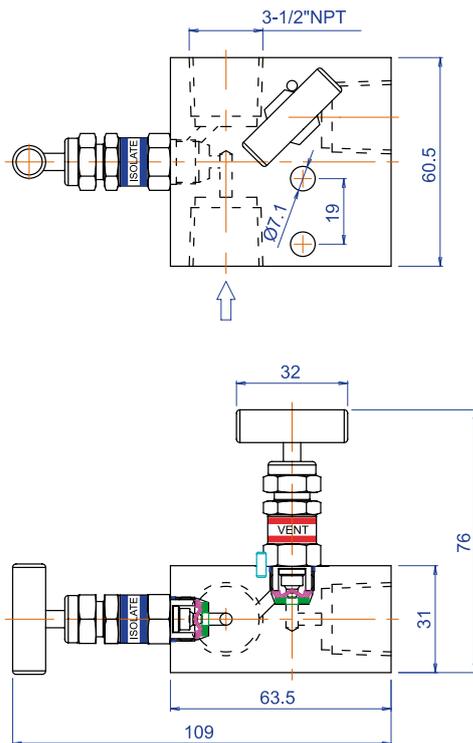



FLOW DIAGRAM




| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 2VM02SH | 1/2"NPT female | 1/2"NPT female | 1/2"NPT female | Metal | 6000 psi |

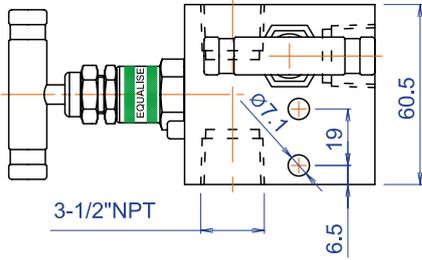


FLOW DIAGRAM

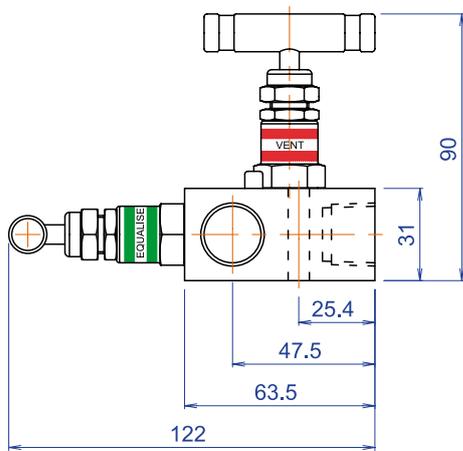

| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 2VM03S | 1/2"NPT female | Flange | 1/4"NPT female | Metal | 6000 psi |

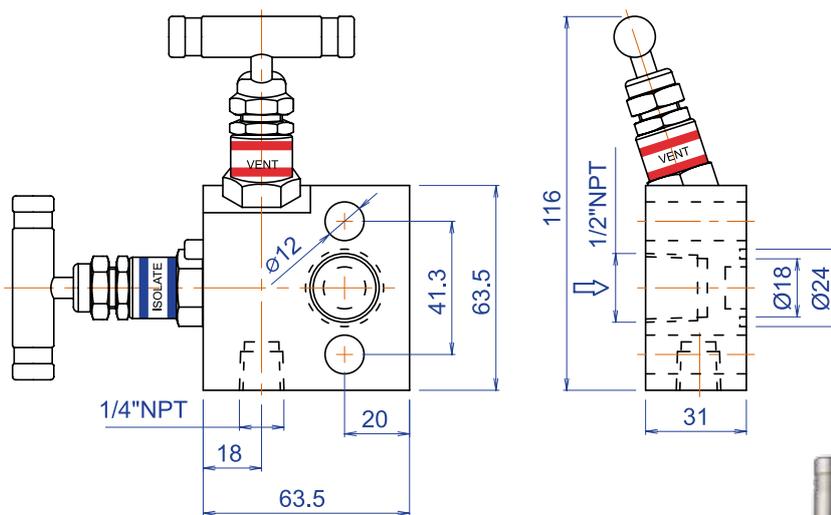


FLOW DIAGRAM




3 Valve Manifolds



| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 3VM01S | 1/2"NPT female | 1/2"NPT female | 1/4"NPT female | Metal | 6000 psi |

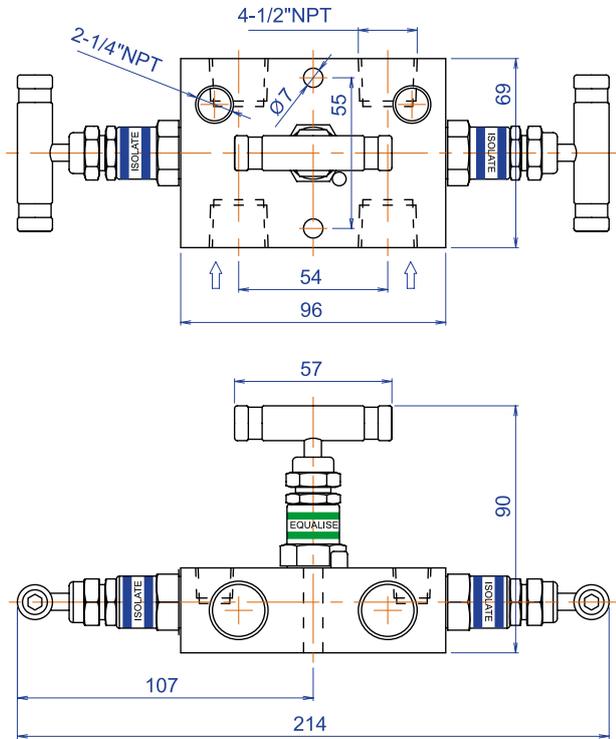


FLOW DIAGRAM



| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 3VM02S | 1/2"NPT female | For pressure transmitter model 3051 | 1/4"NPT female | Metal | 6000 psi |


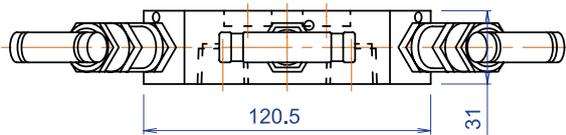


FLOW DIAGRAM

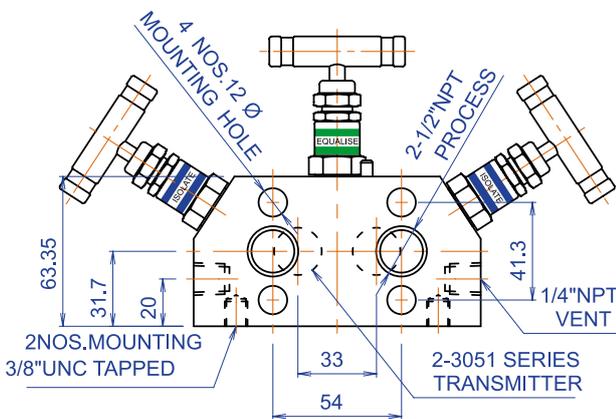


| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 3VM03S | 1/2"NPT female | Flange | 1/4"NPT female | Metal | 6000psi |

Manifold is supplied with two Teflon[®] sealing rings on instrument ports.

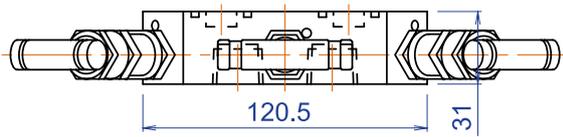


FLOW DIAGRAM


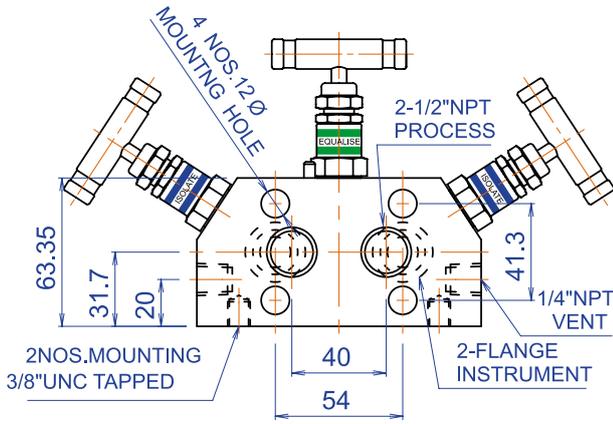


5 Valve Manifolds


| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 5VM01S | 1/2"NPT female | 1/2"NPT female | 1/4"NPT female | Metal | 6000psi |

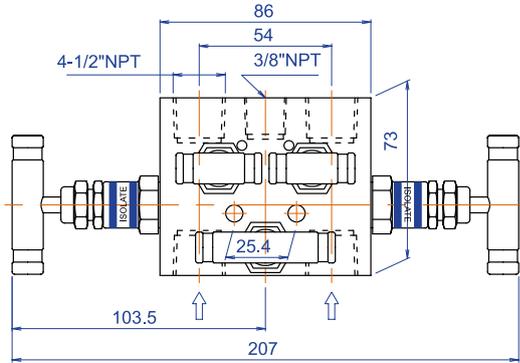



FLOW DIAGRAM

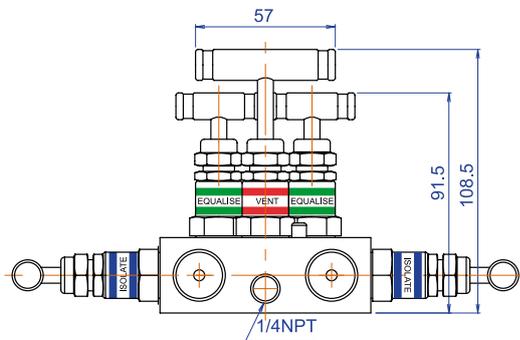

| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|---------------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 5VM02S | 1/2"NPT female | 1/2"NPT female | 1/4"NPT female | Delrin [®] | 6000psi |

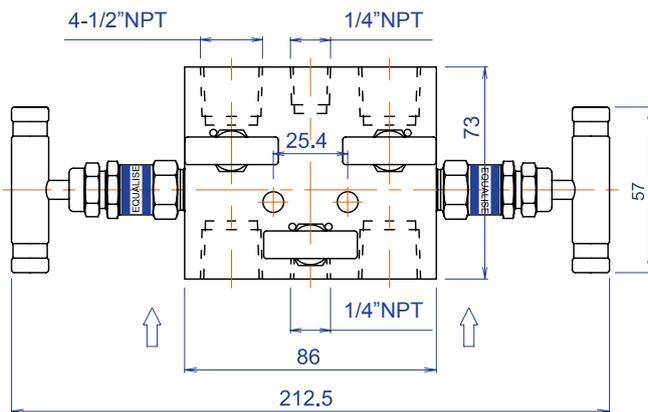


FLOW DIAGRAM

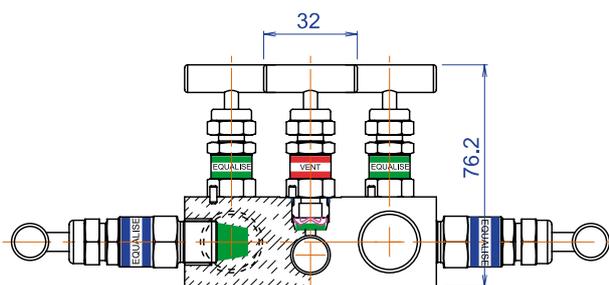


| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 5VM03S | 1/2"NPT female | Flange | 1/4"NPT female | Metal | 6000psi |

Manifold is supplied with two Teflon[®] sealing rings on instrument ports.

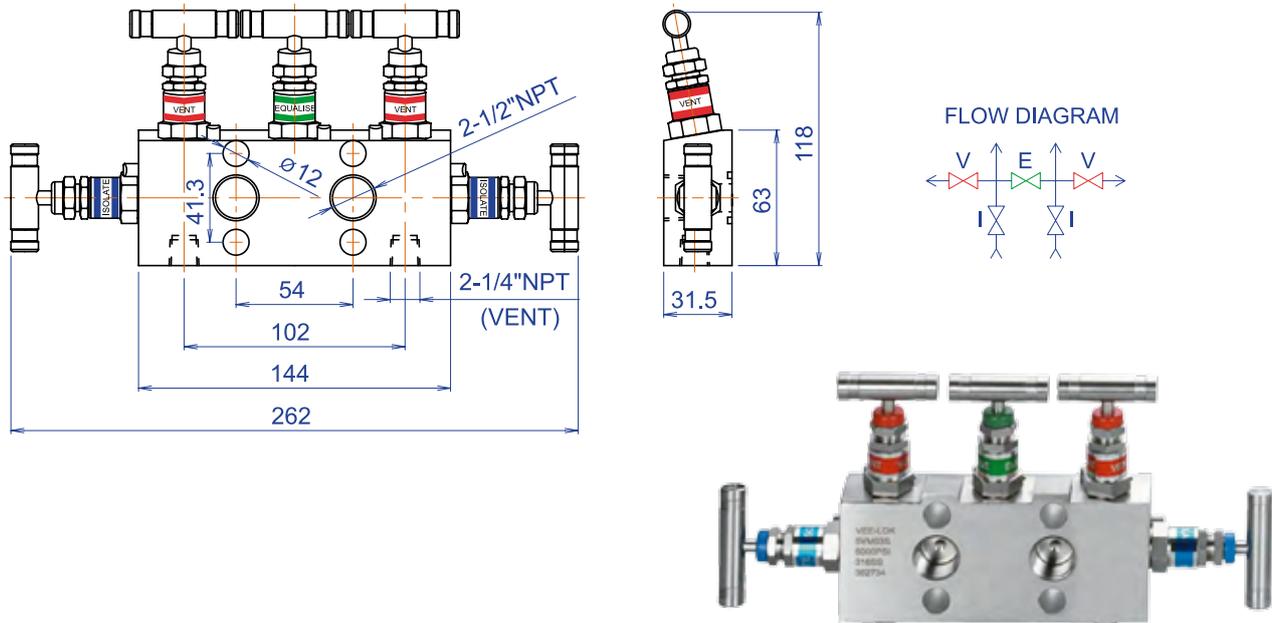

| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 5VM05S | 1/2"NPT female | For pressure transmitter model 3051 | 1/4"NPT female | Metal | 6000psi |

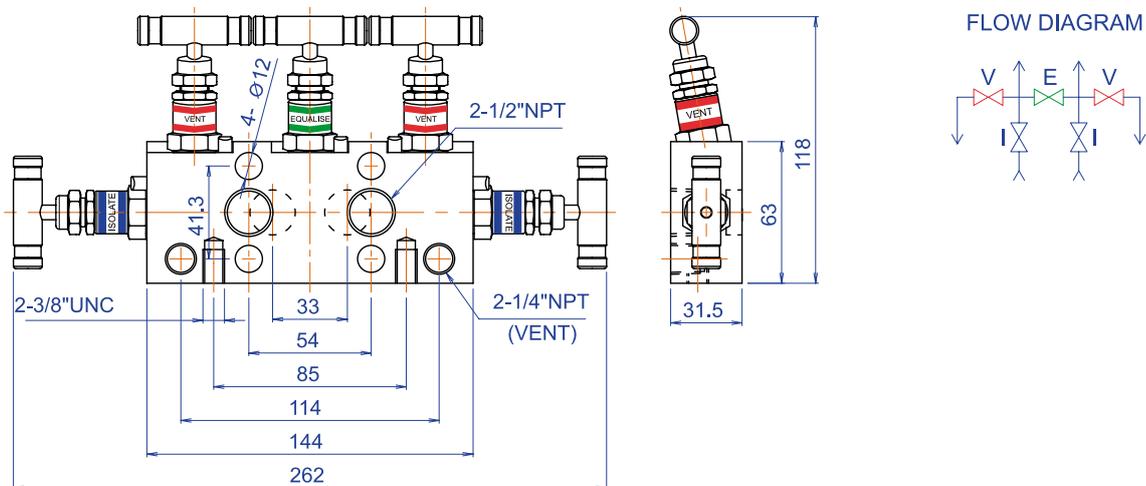

| Ordering No. | End Connection | | | Valve Seat | Max. W.P. at 38°C (100°F) |
|--------------|----------------|-------------------|----------------|------------|---------------------------|
| | Inlet/Process | Outlet/Instrument | Vent/Test | | |
| 5VM06S | 1/2"NPT female | Flange | 1/4"NPT female | Metal | 6000psi |

Manifold is supplied with two Teflon[®] sealing rings on instrument ports.

FLOW DIAGRAM

